

EKL1-63 6KA RCCB EKL1-63H 10KA RCCB

Residual Current Circuit Breaker Standard_ IEC61008-1



Technical Data




Electrical Features	Mode	Electromagnetic
	Type	AC,A,G,S
	Rated current I_n	16,25,32,40,63,80A
	Poles	2P(1P+N),4P(3P+N)
	Rated voltage U_e	2P 240V~ 4P 415V~
	Insulation voltage U_i	500V
	Rated frequency	50/60Hz
	Rated residual operation current($I_{\Delta n}$)	10,30,100,300mA
	Rated residual making and breaking capacity ($I_{\Delta m}$)	500A($I_n \leq 40A$), 10In($I_n > 40A$)
	Short-circuit current $I_{nc} = I_{\Delta c}$	EKL1-63 6,000A
		EKL1-63H 10,000A
	SCPD fuse	EKL1-63 6000
		EKL1-63H 10000
	Break time under $I_{\Delta n}$	$\leq 0.1s$
	Rated impulse withstand voltage(1.5/50) U_{imp}	4000V
	Dielectric test voltage at ind.Freq. for 1min	2.5kV
	Electrical life	2,000 Cycles
	Mechanical life	4,000 Cycles
Installation	Contact position indicator	Yes
	Protection degree	IP20
	Ambient temperature(with daily average $\leq 35^\circ C$)	$-5^\circ C \sim +40^\circ C$
	Storage temperature	$-25^\circ C \sim +70^\circ C$
	Terminal connection type	Cable/Pin-type busbar/U-type busbar
	Terminal size top/bottom for cable	25mm ² 18-3AWG
	Terminal size top/bottom for busbar	25mm ² 18-3AWG
	Tightening torque	2.5Nm 22In-lbs
	Mounting	On DIN rail EN60715(35mm) by means of fast clip device
Connection	Power supply in both directions	

EKL1-63 6KA RCCB EKL1-63H 10KA RCCB




Residual Current Circuit Breaker ----- Standard_ IEC61008-1

Tripping Current Range	Type	Tripping current I_{Δ}/A	
	AC		$0.5I_{\Delta n} < I_{\Delta} < I_{\Delta n}$
A	Lagging Angle	$I_{\Delta n} > 0.01A$	$I_{\Delta n} \leq 0.01A$
	0°	$0.35I_{\Delta n} \leq I_{\Delta} \leq 1.4I_{\Delta n}$	$0.35I_{\Delta n} \leq I_{\Delta} \leq 2I_{\Delta n}$
	90°	$0.25I_{\Delta n} \leq I_{\Delta} \leq 1.4I_{\Delta n}$	$0.25I_{\Delta n} \leq I_{\Delta} \leq 2I_{\Delta n}$
	135°	$0.11I_{\Delta n} \leq I_{\Delta} \leq 1.4I_{\Delta n}$	$0.11I_{\Delta n} \leq I_{\Delta} \leq 2I_{\Delta n}$

Alternative Current Sensitive	Pulsating direct current sensitive	Surge current proof
		
They react to AC current which, whether suddenly applied or slowly arising.	They react to AC and pulsating DC fault current which reach 0 or almost 0 within one time period of the mains frequency.	RCCB' s surge capacity. Not tripping at standardized 8/20 us surge-current waves acc. to VDE 0432 Part 2 with surge current values of up to 250A.

Circuit Diagram

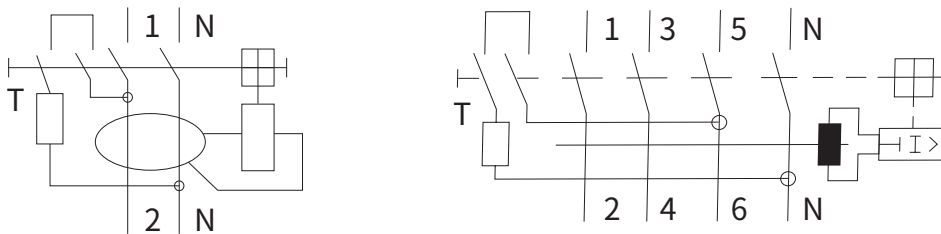

Overall and Installation Dimension(mm)

